

Knee Operated Hand Wash Basin

Professional catering equipment

Pack Contains

- 1 x Sink unit

3 x Flexible hose

1 x Mixer valve

1 x Metal wall bracket


1 x Fixings bag
- 1 x Tap

1 x Push button


1 x Plug unit

1 x Waste/trap unit


1 x sink unit

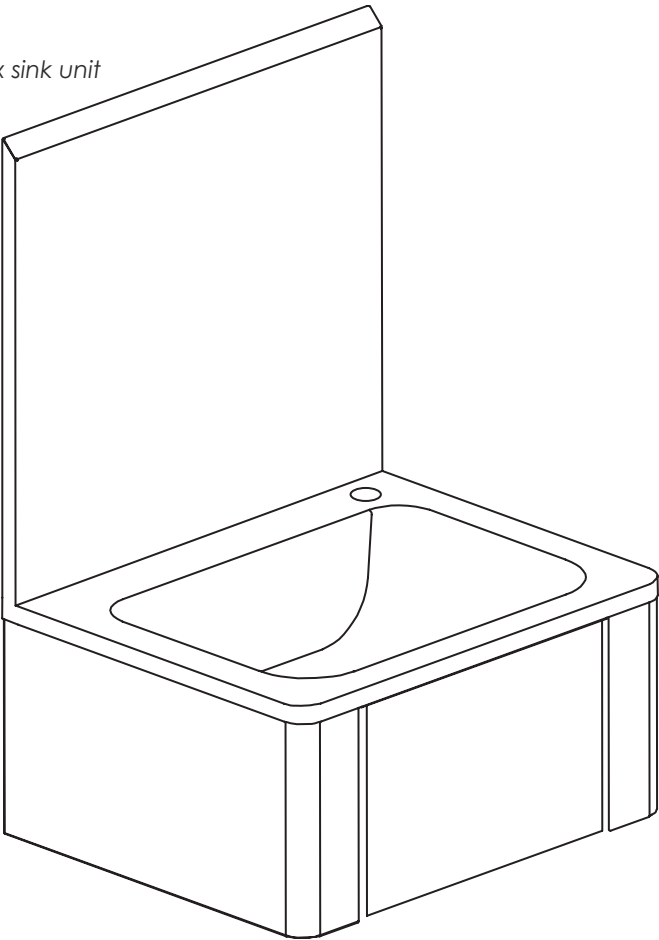


3 x flexible hose

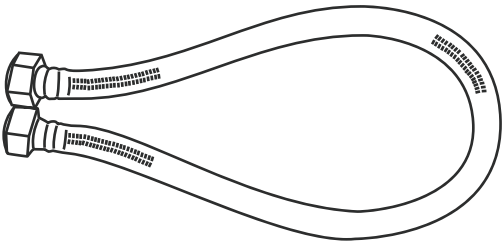


1 x wall bracket




1 x tap

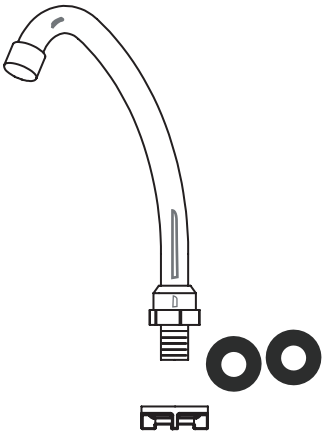


1 x push button




1 x mixer valve




1 x plug unit

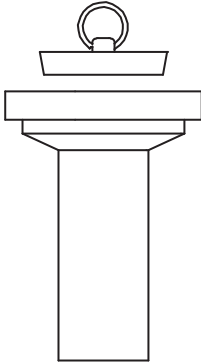

1 x waste/trap unit

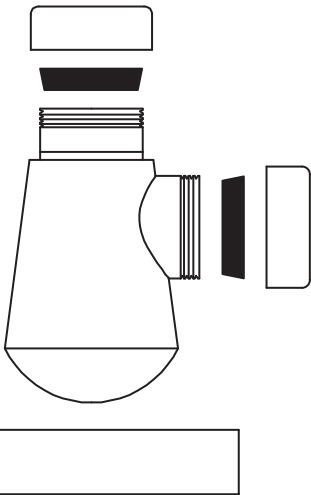

1 x fixings bag



Knee Operated Hand Wash Basin

1. Installing tap

Unscrew the plastic nut from the base of the tap, place thread of tap through the hole located to the right corner of the sink bowl. Reattach the plastic nut to the thread of the tap on the underside of the sink securing the tap in place (fig 1).

2. Flexible hose

Screw one end of the flexible hose to the thread of the tap on the underside of the sink. Note: there are two spare washers supplied (fig 1).

3. Push Button installation.

Lift knee flap on the sink to reveal a metal panel with a hole to the centre, unscrew the golden nut from the push button unit and place thread 1 through the hole, making sure the button faces the front. Secure this in position by reattaching the golden nut to thread 1. When tightening the golden nut make sure that thread 2 is pointing down (fig 2).

4. Flexible hose

Take the free end of the flexible hose and attach it to thread 2 on the push button unit (fig 2).

5. Mixer valve

Attach the mixer valve to thread 1 of the push button unit (fig 2).

6. Plug unit

To install the plug unit unscrew the central bolt that holds the plastic waste pipe and the metal drain together. Then place the metal drain inside the plug hole in the sink basin. Attach the plastic waste pipe to the underside of the basin using the long bolt ensuring that the black rubber seal is positioned between the basin and the plastic waste pipe.

7. Trap

Attach the trap to the plastic waste pipe ensuring that it is in a vertical position.

8. Fixing to the wall

Fix the wall bracket to the wall using the screws provided. Hang the sink unit on the wall bracket using the lip on the reverse of the splashback, it should simply slide on. Once hung use the two remaining screws to secure base of sink to the wall. Run a Silicon seal between the splashback and the wall.

9. Connecting pipes

Connect the hot/cold water inlet pipes to the mixer valve (using female 15/21 connector) (fig 2).

Attach the waste water pipe (32mm diameter) to the waste unit.

10. Soap Dispenser

Drill holes on wall, fix the appliance by wall anchors and screws enclosed. Or thoroughly degrease the splashback, use the adhesive pads (not provided) to fix dispenser to the splashback in desired position.

fig 1.



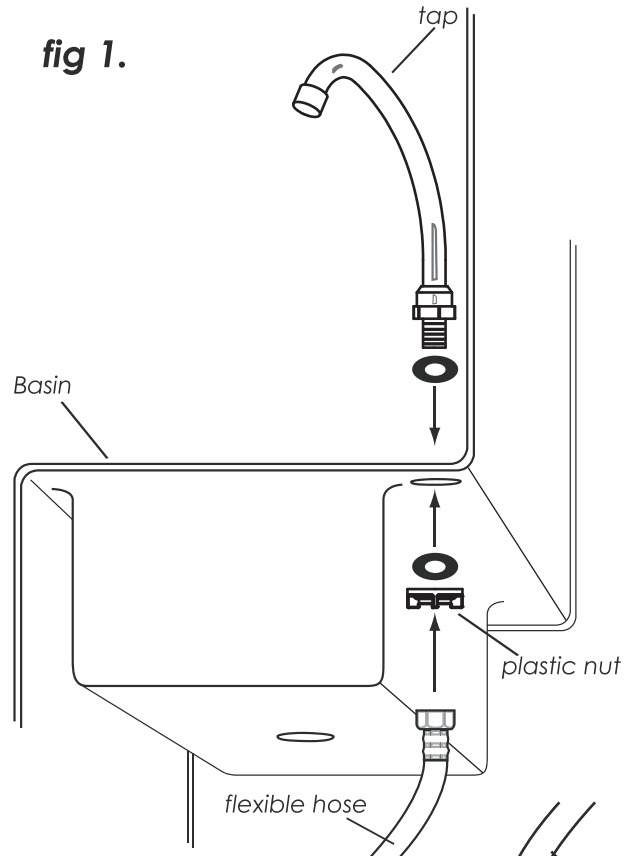


fig 2.

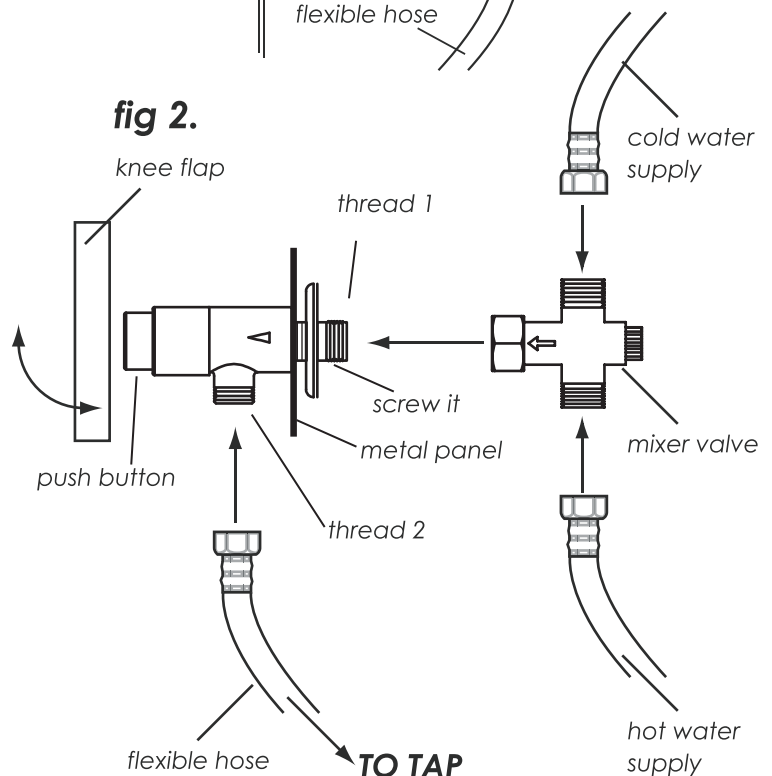

The mixer valve MUST be installed like the left, NOT the right, (PS: please notice the arrows)

✓ **CORRECT**



✗ **WRONG**

